



Sunol Sciences Corporation

System Controller



Model SC110V

.01 cm or degree resolution
+ TTL Triggering

Fully independent control of up to **THREE** positioning devices
and **THREE** auxiliary devices

- Up to three independent Channels allow full control of three devices
- Modular design permits on-site addition of channels
- Soft limits always visible on display
- Variable speed control through front panel or GPIB interface
- Rack mount option
- Fiber optic interface; ST connectors
- Full manual control from front panel
- 115 or 230 volts AC
- System diagnostics
- Up to three channels for remote switching of auxiliary equipment
- Compatible with industry standard automation software
- Remote upgradeable firmware
- Expanded command set : SPEED, TARGET, SCAN, AUX
- LCD display
- Independent jog keys
- GPIB TARGET command
- Self-test
- Fully IEEE488.2 compatible

9/06




Sunol Sciences Corporation

Purchase and Upgrade Options:


ONE, ...



... TWO, ...

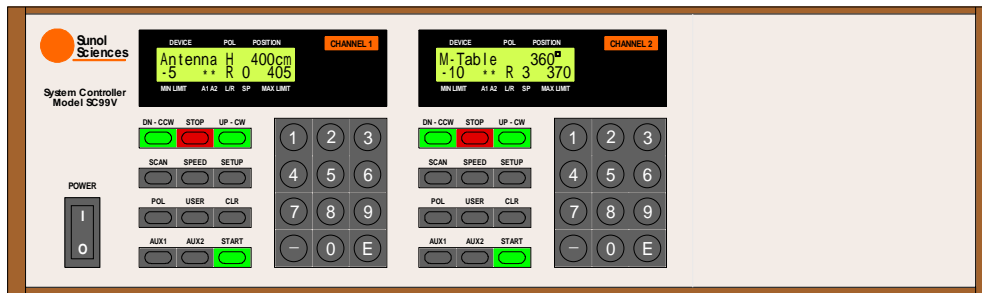

... or THREE modules

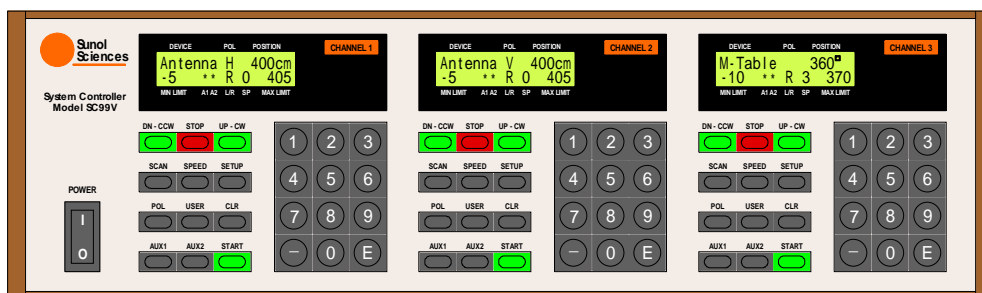

**Each module contains one channel of full device control
plus two auxiliary channels**